



The Raymond® Walkie Pallet Truck Model 102XM

The rugged 4,500 lb. capacity *Raymond*® 102XM Walkie Pallet Truck is a low cost, highly maneuverable, ergonomically designed performer. It's ideal for crowded loading docks, congested aisles – and especially those tight spaces inside trailers.

The unique handle provides smooth, comfortable control as the operator walks. Whether traveling tractor-first or forks-first, the truck's direction and speed are controlled with convenient thumb wheels. This allows one-handed operation for forward, reverse, lift, lower or horn. In addition, easy-to-read displays on the handle include battery discharge indicator, hour meter and error code display.


Get these advantages with the 102XM

- Easily perform 180° pinwheeling for loading and unloading
- Program performance to match operator skill level
- Tilt handle up to operate in tight places
- Maneuver easily over floor obstacles
- Enjoy fast, easy servicing
- Choose standard or cold storage conditioning packages
- Get long term dependability with tough, durable design

RAYMOND
Above. And beyond.®

www.raymondcorp.com

Specifications—Walkie Model 102XM

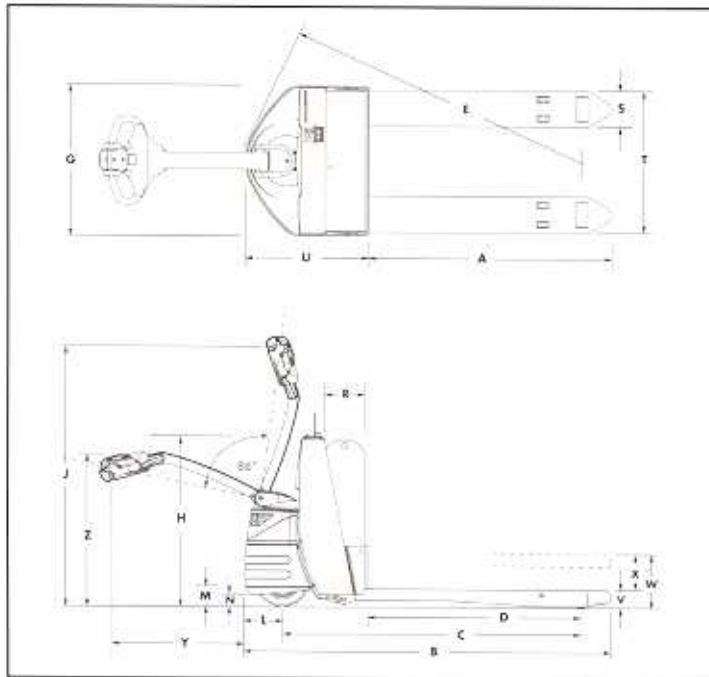


DIMENSIONS AND SPECIFICATIONS		102XM		
Nominal Fork Length †	in	36	42	48
A Actual Fork Length	in	33.5	39.5	45.5
B Overall Length	in	56.6	62.6	68.6
C Wheelbase, Lowered/Raised	in	43.9/40.8	49.9/46.8	55.9/52.8
D Load Wheel Location, Lowered/Raised	in	27.9/24.6	33.9/30.6	39.9/36.6
G Truck OAW	in	28		
H Power Unit Height	in	31.9		
J Control Handle Height	in	48.6		
L Bumper to Drive Tire Center	in	7.0		
M Bumper Underclearance	in	3.0		
N Toe Underclearance	in	2.2		
R Battery Compartment Width *	in	7.8		
S Fork Width (each)	in	6.75		
T Fork OAW, Nominal/Actual ††	in	22/21.5		27/26.5
U Head Length	in	23		
V Fork Down Height	in	3.25		
W Elevated Height	in	8.65		
X Lift	in	5.4		
Y Handle Length	in	27.8		
Z Handle to Floor	in	25.9		
Drive Tire, rubber	in	10 x 5		
Load Wheels, polyurethane	in	3.25 x 4.5		
Truck Weight, less battery	lbs	600		
Battery Connector		SB-175 red		
Battery Lead Position/Length	in	8/18		
Battery Voltage	V	24		
Minimum Battery Weight	lbs	200		

* 9.0 in. Battery Compartment is available as an option.

†† Actual Fork OAW is .5 in. narrower than Nominal Fork OAW for added truck maneuverability.

† Other widths and lengths available.

Due to continuous product improvements, all terms, conditions and specifications are subject to change without notice. Raymond and Above. And beyond are registered trademarks of The Raymond Corporation. © 2003 The Raymond Corporation, Greene, NY. Printed in USA. 3276-0094 1023CT-30

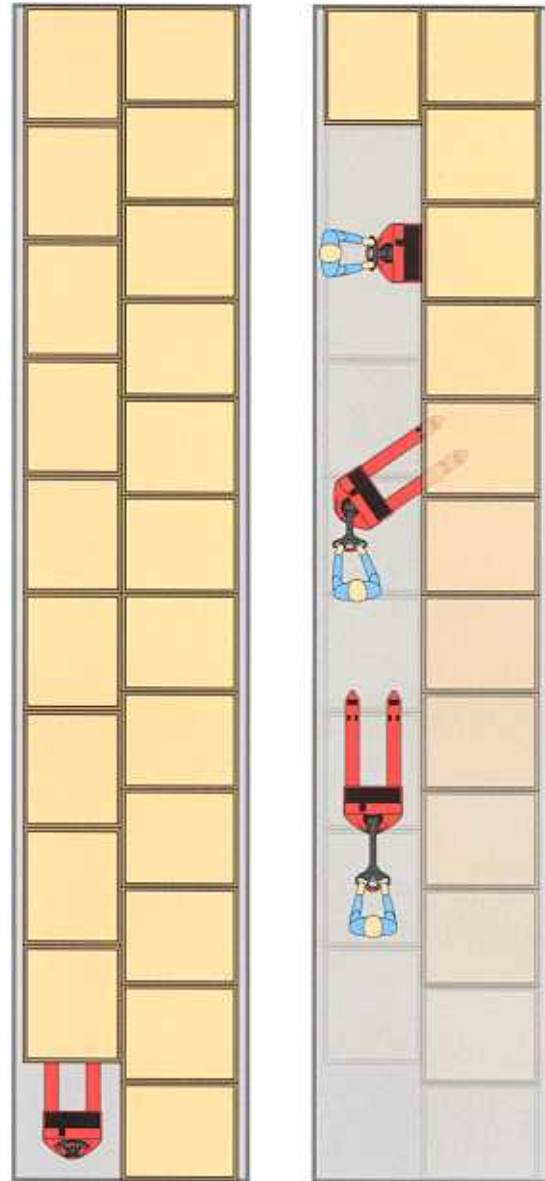

Right angle stacking illustrated with standard GMA pallet (40"x48").

PERFORMANCE SPECIFICATIONS		102XM	
Capacity	lbs	4500	
Gradability	empty/loaded	%	10/6 (4500 lb. load)
Gradability	empty/loaded	%	10/10 (2500 lb. load)
Lift Time	empty/loaded	sec.	3.0/3.9
Travel Speed	empty/loaded	mph	3.8/3.4
Turning Radius *	lowered/raised	in	62.9/59.8
Right Angle Stacking *		in	94.5

* For 48" truck.

RAYMOND
Above. And beyond.®

The Raymond Corporation
P.O. Box 130
Greene, New York 13778-0130
Toll free 1 (800) 235-7200
Fax 1 (607) 656-9005

www.raymondcorp.com