

CoolLift®



MAGLINER®

1-800-MAGLINE (624-5463)
www.magliner.com

CoolLift®



- More cases per transport increase productivity
- Hydraulic dual wheel disc brake system
- Center tilt design navigates easily over thresholds and bumps
- 360° maneuverability in store aisles and most coolers
- 24-volt battery system may be charged from a standard wall unit or on board a delivery vehicle
- Non-marking, 6"x2" thermoplastic rubber casters
- Three point deck support increases pallet stability

U.S. Patent #8,282,111 8,894,076


| SPECIFICATIONS <i>Lift Only Models</i> | | | | |
|--|------------------|---------------|-----------------|-----------|
| P/N | SIZE (L X W X H) | WEIGHT (LBS.) | CAPACITY (LBS.) | CASE LOAD |
| CTA43 | 56" x 19" x 62" | 230 | 1,200 | 40 |
| CTA48 | 56" x 19" x 62" | 230 | 1,350 | 45 |
| CTA53 | 56" x 19" x 62" | 222 | 1,500 | 50 |

Propulsion models only:

- Propulsion option provides forward and reverse speed at 2 mph
- Interlock button on throttle minimizes accidental activation of propulsion system

| SPECIFICATIONS <i>Models With Propulsion</i> | | | | |
|--|------------------|---------------|-----------------|-----------|
| P/N | SIZE (L X W X H) | WEIGHT (LBS.) | CAPACITY (LBS.) | CASE LOAD |
| CPA43 | 63" x 19" x 62" | 346 | 1,200 | 40 |
| CPA48 | 63" x 19" x 62" | 346 | 1,350 | 45 |
| CPA53 | 63" x 19" x 62" | 338 | 1,500 | 50 |

PALLETS

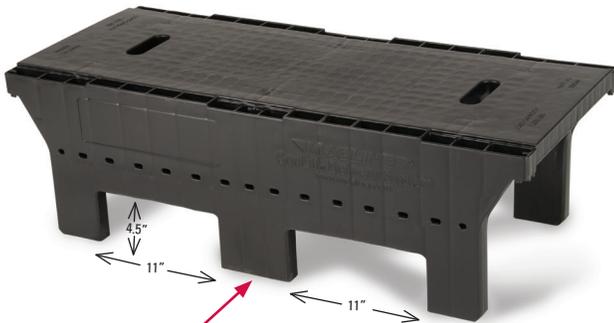


Fits all standard fork truck and electric pallet truck tine widths.

- Empty pallets interlock, optimizing warehouse and delivery vehicle storage space inside delivery vehicle
- Pallets self-align and interlock with the CoolLift deck when raised for safe, secure product movement during delivery
- Pallets integrate with warehouse automation systems, and warehouse personnel can pick and load/unload multiple pallets simultaneously using the optional pallet adaptor available for forklifts and walkie riders

| SPECIFICATIONS | | | | |
|----------------|---------------------|---------------|-----------------|-----------|
| P/N | SIZE (L X W X H) | WEIGHT (LBS.) | CAPACITY (LBS.) | CASE LOAD |
| 309344 | 43" x 18.5" x 13.5" | 25 | 1,200 | 40 |
| 309345 | 48" x 18.5" x 13.5" | 29 | 1,350 | 45 |
| 309346 | 53" x 18.5" x 13.5" | 32 | 1,500 | 50 |

PALLET EXTENSIONS

- Components made of impact-resistant high-density polyethylene (HDPE) for years of use
- Extensions firmly press-fit into pallet legs



| P/N | DESCRIPTION | WT.(LBS.) |
|--------|-----------------------------------|-----------|
| 309722 | for 43" pallets (309185 & 309344) | 1.5 |
| 309723 | for 48" pallets (309186 & 309345) | 2.0 |
| 309724 | for 53" pallets (309187 & 309346) | 2.5 |

ACCESSORIES

ERGO CO₂ CONTAINMENT RACK



Specifically designed to interface with any size CoolLift pallet. No hardware required; rack legs slide into pallet slots.

| CO ₂ RACK SPECIFICATIONS | | |
|-------------------------------------|-----------------------------|-----------|
| P/N | SIZE (L X W X H) | WT |
| 309316* | 45-3/4" x 18-1/2" x 41-3/4" | 47.5 lbs. |

*Pallet not included. Ships complete with 8" E-Track strap.

PALLET MOVER



| SPECIFICATIONS | |
|---------------------------------|----------|
| PALLET MOVER CPMUNV | |
| Capacity | 750 lbs. |
| Deck height (fully lowered) | 11" |
| Deck height (fully raised) | 13.25" |
| Overall length, handle extended | 82" |
| Overall length, handle upright | 53-1/2" |
| Overall height, handle extended | 35" |
| Overall height, handle upright | 53" |
| Weight | 55 lbs. |

U.S. Patent Pending.

- Designed for indoor use
- Compatible with all CoolLift pallet lengths
- Multiple handle positions allow pulling or pushing of loads
- Highly maneuverable wheel and caster configuration navigates aisles, coolers, and tight spaces with ease
- Completely modular system for easy maintenance and reduced down time

HANDLE OPTION



| P/N | WT.(LBS.) |
|--------|-----------|
| 309330 | 5.0 |

Lift assist handle provides additional leverage for maneuvering uneven tailgates and terrain.

ACCESSORY BAG



| P/N | SIZE (L X W) | WT.(LBS.) |
|--------|--------------|-----------|
| 309256 | 10" x 18" | .25 lbs. |

Perfect for hand-held computers and printers.

CURB RAMP



| P/N |
|------|
| RDCR |

- Gain entry to building when an access ramp is unavailable.
- Sturdy, lightweight aluminum construction is easily handled by one person.
- Twin-tooth deck design provides traction in either direction for safer delivery.

| SPECIFICATIONS | |
|----------------|------------|
| Capacity | 3,000 lbs. |
| Usable width | 26" |
| Overall width | 29" |
| Overall length | 44" |
| Height range | 9" |
| Weight | 43 lbs. |

Coolift®

PALLET ADAPTER FOR USE WITH FORK TRUCK AND WALKIE-RIDER



- Rugged, heavy-duty steel construction
- Adjustable fork tine pockets accommodate both pallet jacks and fork trucks
- Minimum of 1" gap between fork pockets when loaded stops stretch wrap from rubbing
- Pallets rest against fork truck tines (or pallet jack battery box) so a separate "back stop" is not needed



- 1-1/2" offset design allows each pallet to be set down individually

| PART NUMBER | WEIGHT | CAPACITY (LBS.) |
|--|----------|-----------------|
| 309190 adapter for 43" and 48" pallets | 335 Lbs. | 2,400 |
| 309190L 43" and 48" pallet adapter with legs | 371 Lbs. | 2,400 |
| 309214 adapter for 53" pallets | 350 Lbs. | 3,000 |
| 309214L 53" pallet adapter with legs | 438 Lbs. | 3,000 |



- Permanently attached 1/4" safety chain fastens easily to fork truck
- 1/2" gap allows proper alignment of pallets built with product overhang




- Retracting leg option available for easy storage of the pallet adapter when using a walkie rider

U.S. Patent # 9,458,000

COLLAPSIBLE PALLET PICKING ADAPTER FOR WALKIE-RIDERS ONLY

Increase warehouse efficiency and save valuable floor space by using the same pallet moving equipment for both Coolift and conventional pallets.

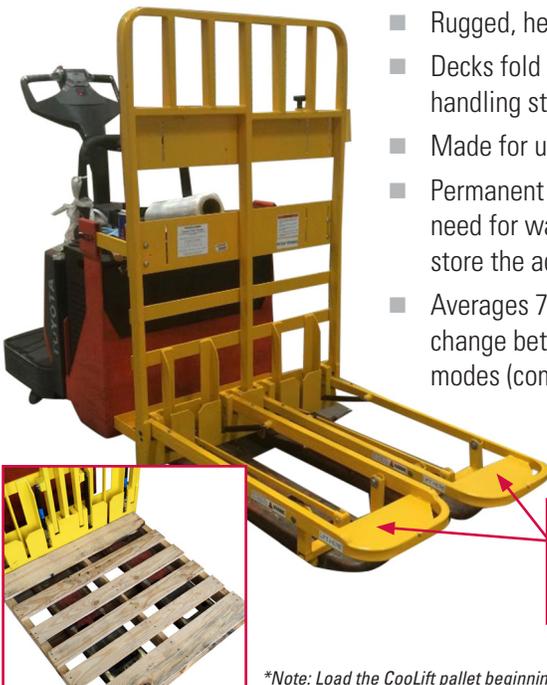

- Rugged, heavy-duty steel construction
- Decks fold up when not in use for handling standard stringer pallets
- Made for use with any size Coolift pallet
- Permanent installation eliminates need for warehouse space to store the adapter
- Averages 75% less time to change between Coolift pallet and conventional pallet modes (compared to removable pallet adapter models)

Bulk head design does not obstruct driver visibility or allow product to fall through

Dampering feature controls deck lowering

Non-binding link system provides smooth movement between deck positions - only 15 lbs. of force needed to lift each deck

Platform is offset vertically by 1-1/2" to allow each pallet to be set down individually

**Note: Load the Coolift pallet beginning at the bulkhead and cube outward to avoid tipping.*

U.S. Patent # 9,457,999

| SPECIFICATIONS | |
|---------------------------|------------|
| Overall Depth (collapsed) | 2-1/2" |
| Height | 60" |
| Width | 37-1/8" |
| Weight | 220 lbs. |
| Capacity | 3,000 lbs. |

www.magliner.com

MAGLINER®

Magline, Inc. ■ 1205 West Cedar Street ■ Standish, MI 48658
1.800.MAGLINE (624.5463) ■ (989) 512.1000 (Outside U.S. & Canada) ■ Fax: (989) 803.5941

© COPYRIGHT 2017, MAGLINE, INC. – FORM B9382